



PHGB000178
U.S.A.



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

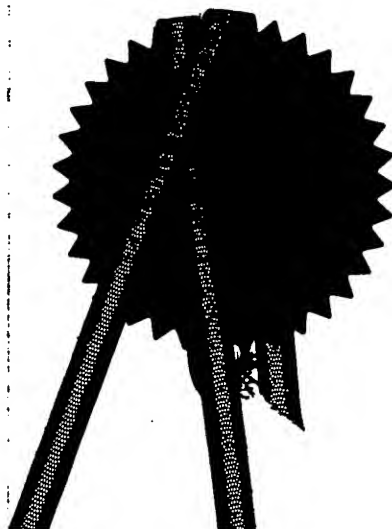

Signed

[Handwritten signature]

Dated: 31 July 2001

An Executive Agency of the Department of Trade and Industry

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

L

21 DEC 2000

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

NEWPORT

1. Your reference

PHGB000178

21 DEC 00 E593404-2 002879
P01/7700 0.00-0031221.5

2. Patent application number
(The Patent Office will fill in this part)

0031221.5

21 DEC 2000

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number *(if you know it)* 741 9294 001

If the applicant is a corporate body, give the country/state of its incorporation

THE NETHERLANDS

4. Title of the invention

COMPRESSED-DATA PROCESSING ARRANGEMENT AND RELATED METHOD

5. Name of your agent *(if you have one)*
"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*

Andrew G. White
Philips Corporate Intellectual Property
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number *(if you know it)* 7658883001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority Application number
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer "Yes" if:*

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description

7

Claims(s)

2

Abstract

1

Drawings

3

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and
search (*Patents Form 9/77*)

Request for substantive examination
(*Patents Form 10/77*)

Any other documents

(Please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

20/12/2000

12. Name and daytime telephone number of
person to contact in the United Kingdom

01293 815339

(S. Townsend)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

**COMPRESSED-DATA PROCESSING ARRANGEMENT
AND RELATED METHOD**

5

The present invention relates to a compressed-data processing arrangement, comprising buffer means for receiving a stream of compressed data and de-multiplexing means for retrieving navigation information embedded within the compressed data, and also to a related method.

10

Such an arrangement and related method are known, for example, from US-A-5,854,873, which discloses a standard technique for processing stored compressed data such as MPEG audio and/or video data. Such known techniques require the following five processing stages. First the compressed data is streamed from, for example, the storage media such as a DVD; secondly the order of the data to be processed is evaluated; thirdly the data is input into a track buffer arrangement in preparation for de-multiplexing; next the data is then de-multiplexed and output to the relevant decoders; and finally the data is then decoded at those decoders for onward delivery to an output channel.

20

It has been found that such known arrangements and related methods exhibit a disadvantageously limited efficiency and memory bandwidth utilisation and also exhibit disadvantageous latency characteristics during data transfers.

25

The present invention seeks to provide for a compressed-data processing arrangement, and related method, offering an advantage over such known arrangements and methods.

30

According to a first aspect of the present invention there is provided a compressed-data processing arrangement of the type defined above and characterised in that the buffer means comprises a common buffer and further

including pointer memory means for storing a plurality of pointers arranged to identify sectors of data in the said common buffer for the delivery to decoding means.

5 With regard to the five stages exhibited by currently known processing systems, the subject of the present invention is derived in particular from an appreciation that, while the first and final stages can remain as standard for the vast majority of stored data processing systems, the present invention is advantageous in optimising the second, third and fourth stages to provide for reordered and/or simultaneous operation so as to advantageously improve the
10 efficiency and memory bandwidth utilisation within the data processing arrangement whilst also serving to reduce the latency currently arising during data transfers. By employing the pointer memory, which serves to look to the common buffer and the actual content inside the sectors of the streamed data received from, for example, storage media such as a DVD, the invention
15 advantageously allows for a direct path between the data and the common buffer and the subsequent decoders.

Thus, as will be appreciated, as compared with known arrangements, the present invention does not require individual buffers and, in a particular example, the invention employs a single unified buffer which is located within a
20 main memory location within which the aforementioned pointer memory can also be located. Individual buffers are therefore not required for receiving the streamed data and this further serves to reduce the potential for latency between the data transfers.

According to another aspect of the present invention there is provided a
25 method of processing compressed data, comprising the steps of receiving a stream of compressed data within buffering means and retrieving navigation information embedded within the compressed data by means of demultiplexing means, characterised by the steps of buffering the said compressed data in a common buffer and employing a plurality of stored
30 pointers for identifying sectors of data in the said common buffer for the delivery to decoding means.

The feature of Claim 2 is advantageous in enhancing the efficiency of operation of the present invention, whereas the feature of Claim 3 is particularly advantageous in effectively sector-processing, and de-multiplexing, all the data found within the stored data stream substantially at the same time.

5 This obviates the need for separate discarding of information at a later stage.

The feature of Claim 4 is particularly advantageous in referencing the physical buffer employed within an embodiment of the present invention.

The feature of Claim 5 is advantageous in effectively performing de-multiplexing during instantaneous transfers of data. This has the further
10 advantage of advantageously reducing the amount of memory required and so serves to speed-up the data processing.

The feature of Claim 6 is particularly advantageous in seeking to minimise latencies that might otherwise arise during data transfers.

15 The invention is described further hereinafter, by way of example only, with reference to the accompanying drawings in which:

Fig. 1 is a schematic block diagram of a compressed-data processing arrangement known in the prior art;

20 Fig. 2 is a schematic block diagram of a compressed-data processing arrangement embodying the present invention;

Fig. 3 is a schematic block diagram illustrating pointer-referencing according to one embodiment of the present invention;

Fig. 4 is a schematic block diagram illustrating pointer referencing of the
25 present invention in accordance with a further embodiment of the present invention; and

Fig. 5 is a block diagram of for example a DVD player embodying a compressed data processing and arrangement and method according to the present invention.

Turning first to Fig. 1, there is illustrated a schematic block diagram of a compressed-data processing arrangement of the type currently known from the prior art.

The compressed-data processing arrangement 10 comprises a source
5 12 of channel data which outputs a signal to a 8/16 demodulation unit 14 which provides an output which is delivered to an error correction stage 16 which, in term, outputs a signal to a track buffer 18 and also to a system buffer 20 and DSI buffer 22. The DSI buffer 22 outputs a signal to a DSI decoder 24.

The track buffer 18 is arranged to deliver an output signal to a de-
10 multiplexer 26 which, in turn, provides separate signals to series connected buffer/decoder pairs comprising a video buffer/decoder pair 28, 30 and audio buffer/decoder pair 32, 34 a subpicture buffer/decoder pair 36, 38 and a PCI buffer/decoder pair 40, 42.

Such an arrangement exhibits disadvantages of the type discussed
15 hereinbefore.

Turning now to Fig. 2, there is illustrated a compressed-data processing arrangement 44 according to an embodiment of the present invention and for receiving channel data from a data source 46. The arrangement comprises a
20 main memory buffer 48 which itself comprises a unified buffer 50 and a pointer memory 52. The unified buffer is arranged to receive compressed data from a data channel 46 which carries compressed data retrieved from, for example, storage media such as a DVD.

Connected to the output side of the unified buffer is a plurality of decoders 54-60 arranged for decoding the compressed data and supplying
25 output signals to subsequent output channels (not shown). Four decoders are illustrated in this example and comprise a video decoder 54, audio decoder 56, graphics decoder 58 and navigation information decoder 60. As illustrated by the arrows, the four decoders are each arranged to point directly at the relevant memory locations within the unified buffer 50 which are referenced by the pointers located in the pointer memory 52. These pointers are, as
30 previously mentioned, located within the same memory block 48 as the unified buffer. In particular, it is considered that the use of a single buffer 50 serves to

optimise the known requirements of identifying the order of the data to be processed, inserting the data into a track buffer and subsequently de-multiplexing the data for output to the various decoders and that are employed separately in the prior art.

5 The principal concept involved in the present invention relates to the use of pointers in the memory 52 to look at the unified buffer 50 and, in particular, the actual content inside the sectors that have been streamed from storage media such as a DVD. This provides a direct path between the data in the unified buffer through to the relevant decoders.

10 The principal distinguishing features of this embodiment of the invention as compared with the prior art are as follows.

First, individual buffers are not required and, as illustrated in Fig. 2, only a single main memory buffer 48 need be employed and which can also store pointers to the unified buffer 50 found within the main buffer memory 48. This advantageously overcomes the need for individual buffers for receiving transferred data and so can serve to reduce the amount of latency between data transfers.

Secondly the necessary navigation information embedded in the data need only be de-multiplexed once. The navigation information is required to indicate the order of the group of sectors to be streamed. Rather than separately de-multiplexing this information out during a transfer, it can be handled by a single de-multiplexer as illustrated later with reference to Fig. 5. This effectively sector-processes and de-multiplexes all of the data within a stored stream at once and does not require the separate discarding of information at a later stage.

It should be appreciated that a method embodying the present invention can comprise a substantially software-based implementation, which can therefore provide greater flexibility and speed of operation for de-multiplexing and processing functions.

30 Various possibilities exist for achieving the pointer referencing required by embodiments of the present invention. Fig. 3 illustrates one example wherein the invention is arranged to allow for a larger amount of data to be

cached into the unified buffer at any one time. A list of pointers 62 is then generated to determine where particular sectors of data are actually held in the unified buffer 48. This data is referenced by the list of pointers 62 which seek to identify the order of the groups of sectors.

5 Since sector and data-packet header IDs are found at a constant number of bytes into the sector, the pointers 62 can quickly and effectively look towards such locations to determine what type of data is present, while the data is actually being transmitted.

Such a cached-disk approach effectively performs the de-multiplexing at
10 a de-multiplexor 64 during instantaneous transfers of the data. This advantageously serves to minimise the amount of memory required and to render the process much faster than current implementations.

In a second example illustrated with reference to Fig. 4, the method again employs a unified track buffer to cache a large amount of data.
15 However rather than just determining where the sectors are held, a second list of pointers 66 is generated and seeks to identify exactly where the data-packets are and what type of data they contain. From this step a list of structures 68 detailing the order and position of the different types of data is generated which can then be used immediately by the subsequent decoder
20 blocks via a de-multiplexer buffer 70.

This further example therefore serves to cache the de-multiplexing process before the data is transmitted. Although it may require more memory than the cached disk approach discussed above, since larger lists will be needed and must be updated each time the track buffer has been filled, this
25 alternative approach will exhibit smaller latencies during transfers than the first approach as the data can be de-multiplexed and sent at a faster speed to the decoders.

Turning lastly to Fig. 5, there is illustrated, in block schematic form an arrangement according to an embodiment of the present invention found
30 within, for example, a DVD player. Like reference numerals as used previously are employed where appropriate within Fig. 5 and in which the track buffer 48 is also arranged to provide for a single de-multiplexing stage

which overcomes the need to separately de-multiplexes navigation information embedded within the channel data as a separate step.

The output from the combined track buffer/de-multiplexor 48 is delivered to series buffer/decoder pairs comprising a video buffer/decoder pair 72, 74,
5 an audio buffer/decoder pair 76, 78, a subpicture buffer/decoder pair 80, 82, a
PCI/decoder pair 84, 86, a DSI buffer/decoder pair 88, 90 and the system
buffer 92.

The data then output from the decoders is delivered onto the display
device of the DVD player in a manner which exhibits enhanced efficiency and
10 memory bandwidth utilisation, and also improved latency characteristics, as
compared with arrangements currently known from the prior-art.

CLAIMS

1. A compressed-data processing arrangement comprising buffer means for receiving a stream of compressed data and de-multiplexing means for retrieving navigation information embedded within the compressed data, characterised in that the said buffer means comprises a common buffer and further including pointer memory means for storing a plurality of pointers arranged to identify sectors of data in the said common buffer for the onward delivery of data to decoding means.
2. An arrangement as claimed in Claim 1, wherein the common buffer and pointer memory are located in a common memory block.
3. An arrangement as claimed in Claim 1 or 2, wherein the de-multiplexing means comprises a single de-multiplexer arranged to provide for common processing and de-multiplexing of all data within the data stream substantially at the same time.
4. An arrangement as claimed in Claim 1, 2 or 3, wherein the pointers are arranged to identify buffer pointer off-set collections within the sectors of data stored within the common buffer.
5. An arrangement as claimed in any one of Claims 1-4, wherein the pointers are arranged to determine the location of data sectors in the common buffer, and such that the data is then referenced by a list of pointers seeking to identify the order of the groups of sectors.
6. An arrangement as claimed in any one of Claims 1-4, when the pointer memory is arranged to include a second list of pointers serving to identify the location of packets of data and also to identify the data contained therein.

7. A DVD player including a compressed-data processing arrangement as claimed in any one of Claims 1-6.

8. A set-top-box arrangement including a compressed-data
5 processing arrangement as claimed in any one of Claims 1-6.

9. A method of processing compressed data, comprising the steps of receiving a stream of compressed data within buffering means and retrieving navigation information embedded within the compressed data by
10 means of de-multiplexing means, characterised by the steps of buffering the said compressed data in a common buffer and employing a plurality of stored pointers for identifying sectors of data in the said common buffer for delivery to decoding means.

15 10. A method as claimed in Claim 9, wherein the said navigation information is retrieved by way of a single de-multiplexer arranged to provide for common processing and de-multiplexing of all data within the data stream substantially at the same time.

20 11. A method as claimed in Claim 9 or 10, and including the step of employing the pointers to identify buffer pointer off-set collections within the sectors of data stored within the common buffer.

25 12. A method as claimed in Claim 9, 10 or 11, and including the steps of arranging the said pointers to determine the location of data sectors in the common buffer, and then referencing the said data by the list of pointers seeking to identify the order of the groups of sectors.

30 13. A method as claimed in Claim 9, 10 or 11, and including arranging the pointer memory to include a second list of pointers serving to identify the location of packets of data and also to identify the data contained therein.

ABSTRACT



**COMPRESSED-DATA PROCESSING ARRANGEMENT
AND RELATED METHOD**

5

The invention provides for a compressed-data processing arrangement (44) comprising buffer means (48) for receiving a stream of compressed data (46) and de-multiplexing means (48) for retrieving navigation information embedded within the compressed data, wherein the said buffer means
10 comprises a common buffer (50) and further including pointer memory means (52) for storing a plurality of pointers arranged to identify sectors of data in the said common buffer (50) for the delivery of data to decoding means (54-60).



[Figure 2]

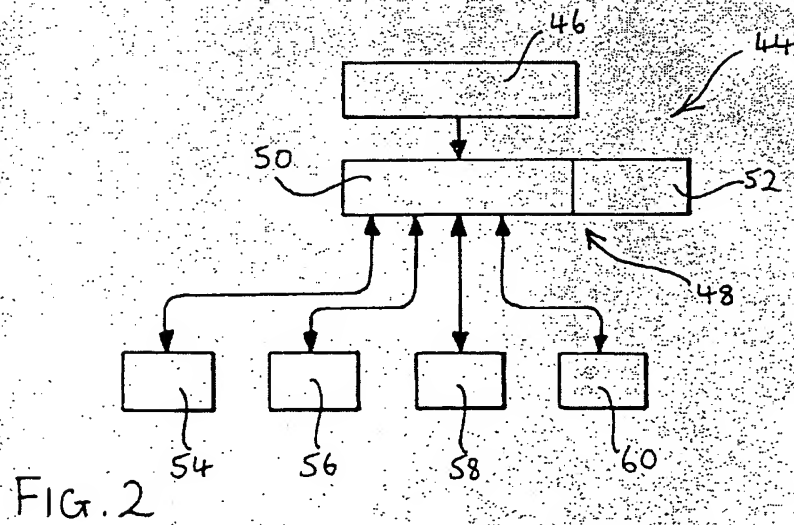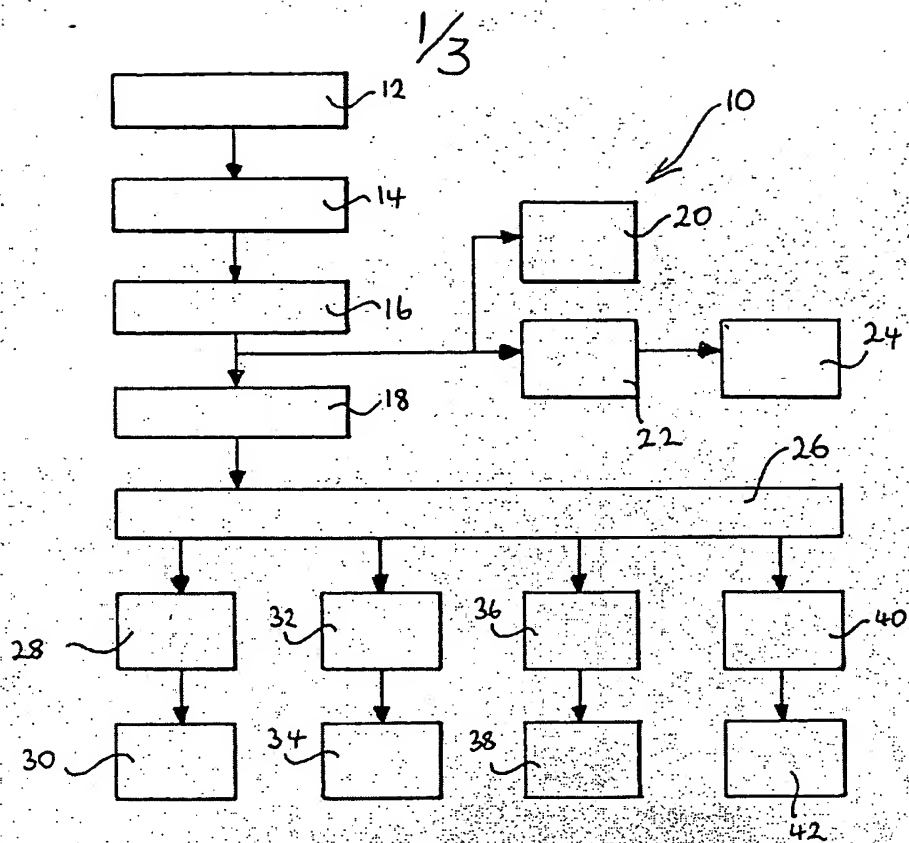

THIS PAGE BLANK (USPTO)

2/3

FIG. 3


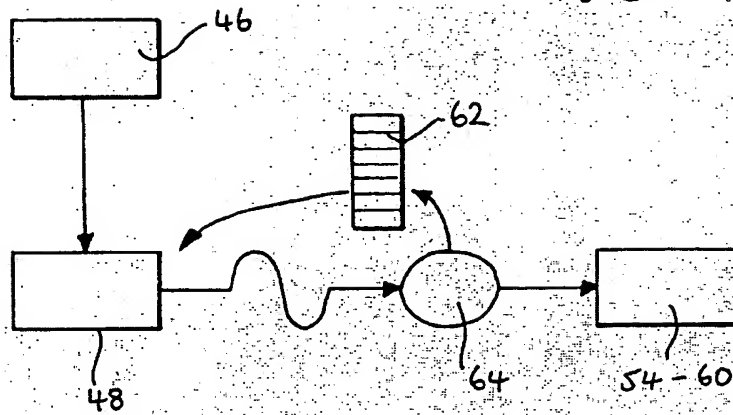



FIG. 4

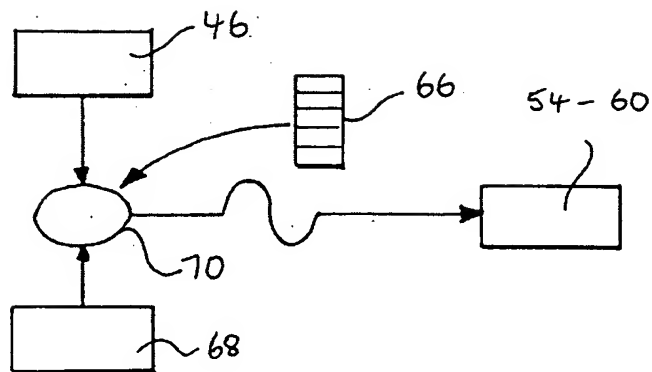

THIS PAGE BLANK (USPTO)

3/3

FIG. 5

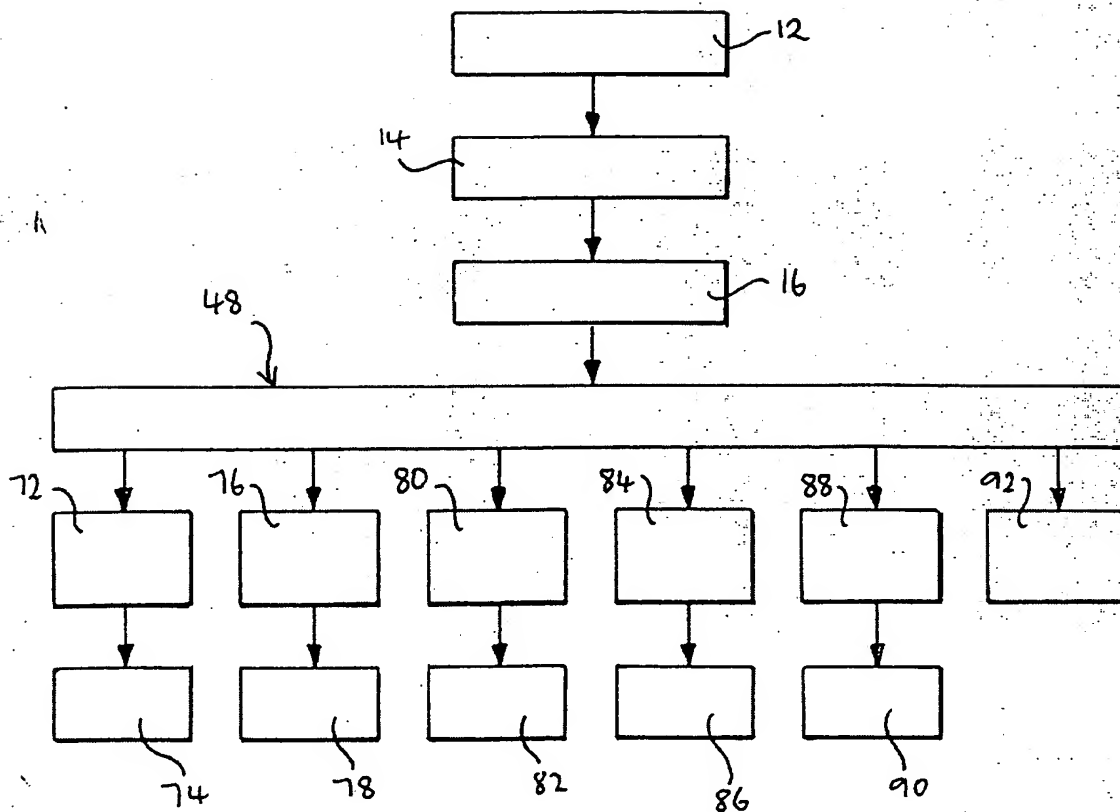

THIS PAGE BLANK (USPTO)